



Stylish 40” screen with 4K resolution and USB hub

The ProLite X4071UHSU-B1 is an impressive 4K (3840 x 2160) monitor, offering a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch) the monitor displays an incredibly sharp and crisp image. The VA panel technology offers exceptional colour performance, high contrast (5000:1) and wide viewing angles. PIP and PBP features allow users to easily create their own work space by displaying and manipulating multiple applications. USB 3.0 HUB, integrated speakers, headphone socket and hook, ensure compatibility across various devices and media platforms for a real multimedia experience. The ProLite X4071UHSU-B1 suits a massive range of applications including desktop publishing, CAD/CAM drawing, gaming, photographic and web design.



4K

UHD resolution (3840x2160), better known as 4K, offers a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch), it displays an incredibly sharp and crisp image.



MVA

MVA technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

01 DISPLAY CHARACTERISTICS

Diagonal	39.5", 100.3cm
Panel	MVA LED, matte finish
Native resolution	3840 x 2160 (8.3 megapixel 4K UHD)
Aspect ratio	16:9
Brightness	350 cd/m ² typical
Static contrast	5 000:1 typical
Advanced contrast	12M:1
Response time	3ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	1.07B (10bit)
Horizontal Sync	30 - 135KHz
Vertical Sync	24 - 75Hz
Viewable area W x H	878.11 x 485.35mm, 34.6 x 19.1"
Pixel pitch	0.229mm
Colour	matte, black

02 INTERFACES / CONNECTORS / CONTROLS

Signal input	VGA x1 (max. 2048 x 1152 @60Hz) HDMI x2 (HDMI1: max. 3840 x 2160 @60Hz, HDMI3: max. 3840 x 2160 @30Hz, 2560 x 1440 @60Hz, 1920 x 2160 @60Hz) HDMI(MHL) x1 (max. 3840 x 2160 @30Hz, 2560 x 1440 @60Hz, 1920 x 2160 @60Hz(HDMI), 1920 x 1080 @60Hz(MHL)) DisplayPort x1
USB HUB	x2 (v.3.0)
HDCP	yes
Headphone connector	yes

03 FEATURES

Blue light reducer	yes
Extra	PiP, PbP
OSD languages	EN, DE, FR, IT, CN, RU, JP, CZ, NL, PL
Control buttons	Power, Input/Select, Up, Down, Menu
User controls	input, picture (picture format, brightness, contrast, sharpness, OD, Adv. contrast, ECO mode, X-Res technology), PiP/PbP (PiP/PbP mode, sub win input, PiP size, PiP position, swap), audio (volume, mute, audio input), color (warm, normal, cool, user color, i-Style color, blue light reducer), language, OSD settings (OSD H. position, OSD V. position, OSD background, OSD time out), setup menu (geometry, DP format, HDMI1 format, opening logo, LED, auto pow. off, memory recall, information)
Speakers	2 x 6W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

04 MECHANICAL

Display position adjustments	tilt
Tilt angle	7° up; 4° down
VESA mounting	200 x 200mm

05 ACCESSORIES INCLUDED

Cables power, USB, HDMI, Audio, mDP - DP, DP

Other quick start guide, safety guide

06 POWER MANAGEMENT

Power supply unit internal

Power supply AC 100 - 240V, 50/60Hz

Power usage 60W typical, 0.5W stand by

07 SUSTAINABILITY

Regulations CE, TÜV-Bauart, VCCI-B, PSE, Energy Star , CU

Energy efficiency class B


EPEAT Silver

EPEAT is a comprehensive environmental rating that helps identify greener computers and other electronic equipment. The Silver certification means the monitor meets all required criteria plus at least 50% of the optional requirements. EPEAT Silver is valid in countries where iiyama registers the product. Please visit www.epeat.net for the registration status in your country.

08 DIMENSIONS / WEIGHT

Product dimensions W x H x D 906.5 x 577 x 238.5mm

Weight (without box) 12.2kg

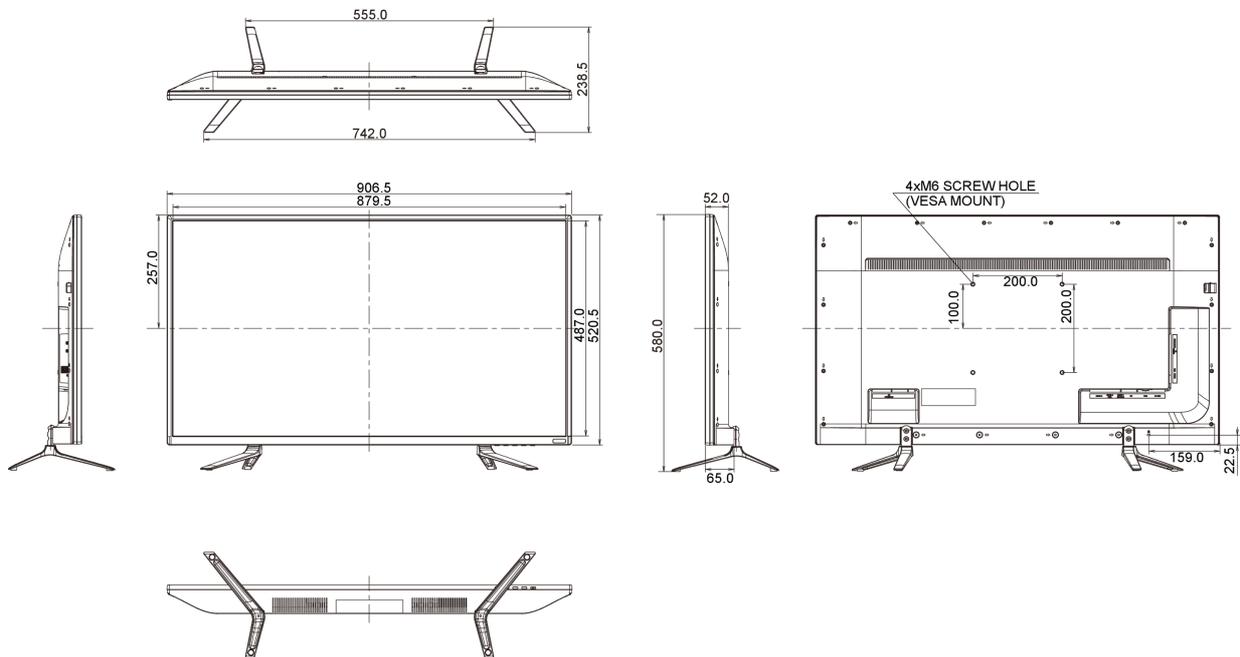

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

